

# VIENNA REMOTE Salat

PROJECT: \_\_\_\_\_  
ITEM: \_\_\_\_\_ QUANTITY: \_\_\_\_\_

## MODEL # VIAP-RR-SALAT

### SPECIFICATIONS

The Vienna Salat is a drop-in salad bar display which circulates air over the product from a mirrored perforated rear tower. Tempered glass display with lift-up front glass doors maintains case temperature and product freshness but allows for easy self-service application. Front flip doors are lockable in 3 positions; for NSF serving as well as operator cleaning and loading. This space saving single-sided unit has the ability for flat or slanted presentation. Unit can also be provided with a stainless base and legs for slide-in application or freestanding display.

Available lengths: ☐ 30 1/8" ☐ 43" ☐ 55 3/4" ☐ 81 1/4"

Available depths: ☐ 27 3/8"

Available heights: ☐ 31 7/8"



### STANDARD FEATURES

- Remote Refrigeration
- 304 Stainless Steel Exterior & Interior
- Adjustable Deck Pan to Convert to Slanted Display
- Easy Removable Deck Pans for Cleaning
- Tempered Glass With Front Flip-Up Doors
- Gas Spring Door Lift in 3 Lockable Positions
- Mirrored perforated rear air tower
- Mirrored rear interior back wall
- LED Top Canopy Light
- Programmable Digital Refrigeration Controller
- Forced Air Cooling System
- Lift-Up Evaporator
- ETL Listed in Accordance with UL 471 and NSF 7 Standards
- Environmentally Safe Refrigerant
- Floor Drain Required

### OPTIONAL FEATURES

- ☐ Self-Contained Refrigeration
- ☐ Stainless Steel Base
- ☐ 6" Stainless Legs
- ☐ Integrations Modular Counter (Consult Factory)
- ☐ Adapter Bars for Standard Pans (Pans Not Included)

| MODEL              | L      | D      | H      | PANS | BTU  | VOLT | AMP | PLUG  | WT  | REFRIG. | CUT-OUT SIZE    |
|--------------------|--------|--------|--------|------|------|------|-----|-------|-----|---------|-----------------|
| VIAP2-0-R-RR-SALAT | 30 1/8 | 27 3/8 | 31 7/8 | 2    | 1263 | 115  | 0.9 | 5-15P | 278 | 134A    | 29 x 26 1/4     |
| VIAP3-0-R-RR-SALAT | 43     | 27 3/8 | 31 7/8 | 3    | 1638 | 115  | 1.0 | 5-15P | 353 | 134A    | 41 3/4 x 26 1/4 |
| VIAP4-0-R-RR-SALAT | 55 3/4 | 27 3/8 | 31 7/8 | 4    | 2048 | 115  | 1.2 | 5-15P | 409 | 134A    | 54 1/2 x 26 1/4 |
| VIAP6-0-R-RR-SALAT | 81 1/4 | 27 3/8 | 31 7/8 | 6    | 2816 | 115  | 1.5 | 5-15P | 596 | 134A    | 80 1/4 x 26 1/4 |

\*BTU/h @ 14°F evap



Conforms to UL Standard 471, and NSF Standard 7; Certified To CSA Standard C22.2 No.120

CALL TOLL FREE: 800-525-3692 (609-714-2330)

FAX: 609-714-2331 [www.rpiindustries.com](http://www.rpiindustries.com)

220 ROUTE 70, MEDFORD, NJ 08055




INDUSTRIES, INC. v3\_23\_21

# VIENNA REMOTE Salat


## MODEL # VIAP-RR-SALAT

**PROJECT:** \_\_\_\_\_


**TOLL FREE: 800-525-3692**

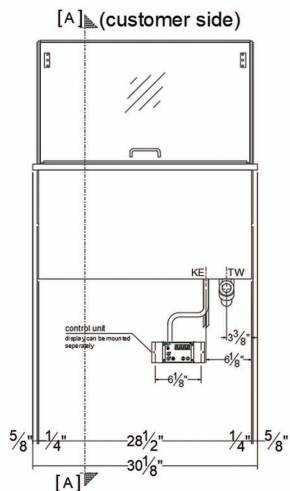


**VIAP2**

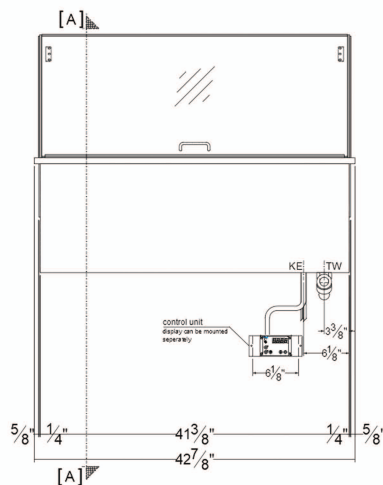


**VIAP3**

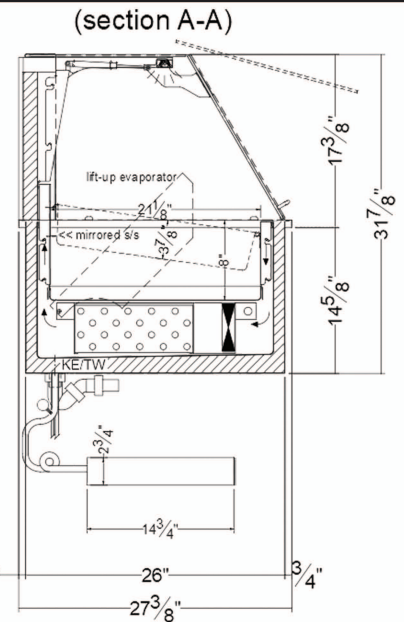


**VIAP2 - VIAP3 - VIAP4 - VIAP6**

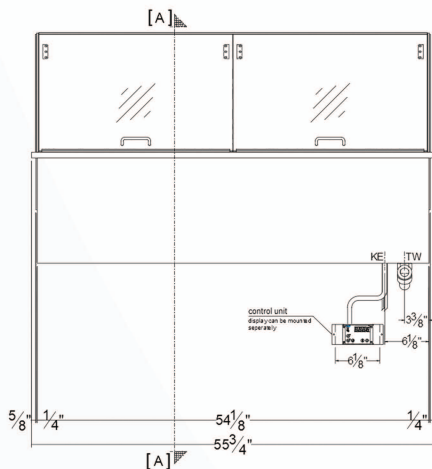

**VIAP4**

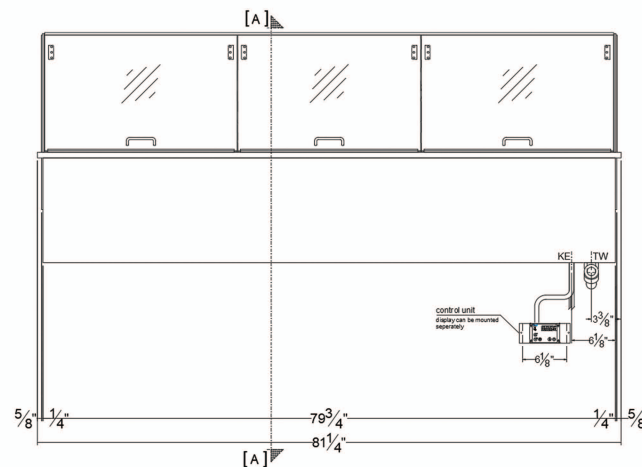

**VIAP6**

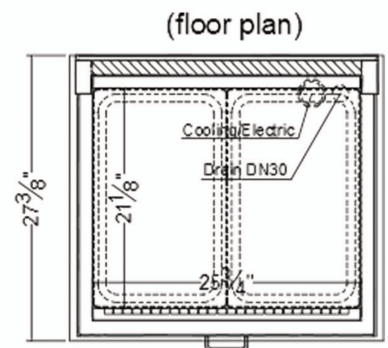

**Electrical & Plumbing locations**

**1 1/8" HOLE REQUIRED FOR COOLING AND DRAINAGE LINES**

1. Front glass is lockable in 3 positions with position 1 being for NSF application. position 2 for operator cleaning and position 3 for operator loading. Glass door does not stay open in these positions unless lock is set by operator.
2. A 1 1/8" diameter drain is provided. For remote units, the drain **MUST** be run to a floor drain **AT TIME OF INSTALLATION**. Factory recommends allowing 6-8" underneath unit for proper drainage.
3. Front and Rear ventilation louvers, **MUST** be provided in the cabinet or counter and located so to provide full ventilation for the condensing unit. Refrigeration System is designed so air will flow rear to front. Unobstructed air flow must be maintained to ensure unit performance and maintain warranty.
4. RPI Merchandiser is designed for use in stores where ambient temperatures and humidity do not exceed 75 Degrees Fahrenheit and 55% R.H. Locate away from direct sunlight, rapid air currents and extreme temperature changes. Exposure to air currents from ceiling fans, air conditioning diffusers, ovens, etc. will disrupt the case air curtain and refrigerated zone. Refrigerated Displays are designed to maintain pre-chilled products. Adding or loading warm products above 41 Degrees Fahrenheit can affect the temperature in the entire cabinet. Any adverse field conditions stated above will void warranty.

RPI in line with its policy to continually improve its products reserves the right to change materials and specifications without notice.

CALL TOLL FREE: 800-525-3692 (609-714-2330)

FAX: 609-714-2331 [www.rpiindustries.com](http://www.rpiindustries.com)

220 ROUTE 70, MEDFORD, NJ 08055

**RPI INDUSTRIES, INC.** v3\_23\_21