

MODEL # VIAS-SQ-FRL SQUARED FRAMELESS GLASS

SPECIFICATIONS

The Vienna Series VIAS-SQ FRL Slide-in with rear air ventilation kit is a self-service "Grab and Go" style refrigeration merchandiser, featuring a squared glass profile, with frameless glass side panels. Unit is available in two lengths and one height with hinged see-through access doors. When being used as a "slide-in" please advise if counter height is 34" or 36". Optional 6" or 8" stainless steel adjustable legs or 6" casters are available for all slide-in style models.



Available lengths: ☐ 31 1/2" ☐ 44 1/4"
Available depths: ☐ 27 3/8"
Available heights: ☐ 28 3/8"

STANDARD FEATURES

- Squared Glass Profile
- 304 Stainless Steel Exterior
- Tempered Glass Top Panel, Frameless Insulated Glass Side Panels capped with stainless
- Hinged Rear See-Through Access Doors
- Fully adjustable Tempered Glass Shelves (tiltable to 7 degrees)
- Easy Removable Deck Pans for Cleaning
- Programmable Digital Refrigeration Controller
- Self-Contained Refrigeration with Integrated Slide-In Base
- Rear Air Ventilation Kit
- Energy Efficient LED Lighting (Plug-In)
- Fan Assisted Cooling System
- Lift-Up Evaporator
- 5 Year Compressor Warranty
- ETL Listed in Accordance with UL 471 and NSF 7 Standards
- Environmentally Safe Refrigerant
- Designed for Floor Drain

OPTIONAL FEATURES

- ☐ Drop-In Style (Consult Factory for Additional Information)
- ☐ Remote Refrigeration
- ☐ Powder Coat Finish
- ☐ Front Air Vent with Solid Rear (for against the wall installation)
- ☐ Rear Cutting Board
- ☐ Mirrored Hinged Rear Access Doors
- ☐ Removable Acrylic Locking Night Cover
- ☐ Rear-Mounted Door Locks
- ☐ Integrations Modular Counter (Consult Factory)
- ☐ Adjustable Legs & Casters (Slide-In Units)
 - ☐ 6" Legs ☐ 8" Legs
 - ☐ 6" Casters
- ☐ Hot Gas Evaporation (self-contained only)
- ☐ Condensate Evaporator Pan (Consult Factory)



Conforms to UL Standard 471, and NSF Standard 7; Certified To CSA Standard C22.2 No.120

SELF CONTAINED	L	D	H	HP	VOLT	AMPS	PLUG	WT	REFRIG.	DROP IN C/O SIZE	SLIDE IN C/O SIZE
VIAS2-27-R-SQ-SC-INS-FRL	31 1/2	27 3/8	28 3/8	1/2	115	9.7	5-15P	484	R452A	29 1/4 x 26 3/8	29 1/4 x VARIES
VIAS3-27-R-SQ-SC-INS-FRL	44 1/4	27 3/8	28 3/8	3/4	115/230	5.6	L14-20P	550	R452A	42 1/8 x 26 3/8	42 1/8 x VARIES
REMOTE	L	D	H	BTU	VOLT	AMPS	PLUG	WT	REFRIG.	DROP IN C/O SIZE	SLIDE IN C/O SIZE
VIAS2-27-R-SQ-RR-INS-FRL	31 1/2	27 3/8	28 3/8	3311	115	2.1	5-15P	484	R452A	29 1/4 x 26 3/8	29 1/4 x VARIES
VIAS3-27-R-SQ-RR-INS-FRL	44 1/4	27 3/8	28 3/8	3993	115	2.5	5-15P	500	R452A	42 1/8 x 26 3/8	42 1/8 x VARIES

CALL TOLL FREE: 800-525-3692 (609-714-2330)


FAX: 609-714-2331 www.rpiindustries.com

220 ROUTE 70, MEDFORD, NJ 08055




INDUSTRIES, INC. v1_11_21

MODEL # VIAS-SQ-FRL SQUARED FRAMELESS GLASS

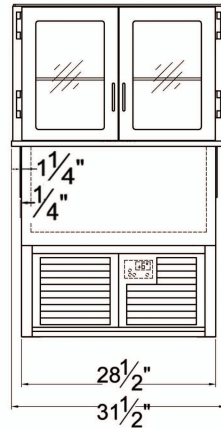


VIAS2-(A)-R-SQ-SC-INS-FRL

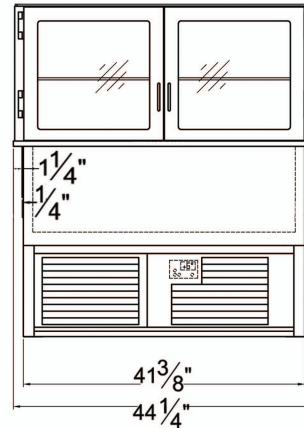

VIAS3-(A)-R-SQ-SC-INS-FRL

VIAS(A)-27-R-SQ-SC-INS-FRL

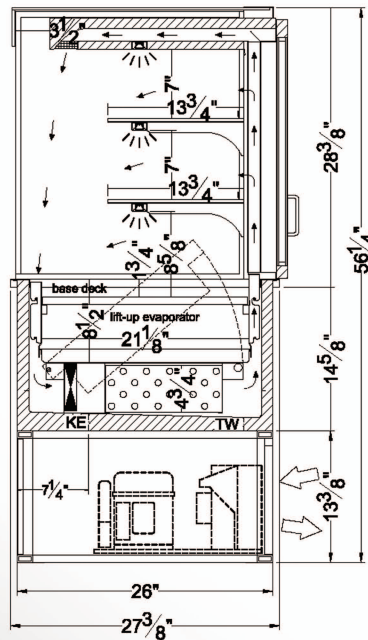


Click on below
links to access
KCL/Revit files

[VIAS2](#) [VIAS3](#)

LARGEST DIMENSION REPRESENTS OUTSIDE FLANGE

1. A 1 1/8" diameter drain is provided. The drain **MUST** be connected to a floor drain or storage container **AT TIME OF INSTALLATION**.
2. Ventilation louvers **MUST** be provided in the cabinet or counter and located so to provide full ventilation for the condensing unit.
3. The VIAS-SQ-INS-FRL merchandiser is designed for use in locations where temperatures and humidity do not exceed 75 degrees and 55% R.H. Locate away from direct sunlight, rapid air currents and extreme temperature changes. Exposure to air currents from ceiling fans, air conditioners, ovens, etc. will disrupt the cases air current and refrigeration zone within. Any adverse field conditions stated above will void warranty.

RPI in line with it's policy to continually improve it's product reserves the right to change materials and specifications without notice.

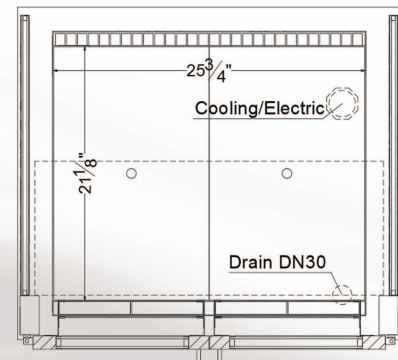

CALL TOLL FREE: 800-525-3692 (609-714-2330)

FAX: 609-714-2331 www.rpiindustries.com

220 ROUTE 70, MEDFORD, NJ 08055



Electrical & Plumbing locations

INDUSTRIES, INC. v1_11_21