

MODEL # VICD-SQ-FRL SQUARED FRAMELESS GLASS

SPECIFICATIONS

The Vienna Series VICD-SQ-FRL Slide-in or Drop-in is a full-service refrigerated display merchandiser, featuring a squared glass profile with frameless insulated glass front, top and side panels. Unit is available in two lengths and one height with hinged rear see-through access doors. When being used as a "slide-in" please advise if counter height is 34" or 36". Optional 6" or 8" stainless steel adjustable legs or casters are available for slide-in style models.

Available lengths: ☐ 31 1/2" ☐ 44 3/8"

Available depths: ☐ 27 3/8"

Available (above counter) heights: ☐ 28"



STANDARD FEATURES

- Squared Glass Profile
- 304 Stainless Steel Exterior
- Insulated Frameless Glass Top and Side Panels
- Hinged Rear See-Through Access Doors
- Fully adjustable Tempered Glass Shelves (tiltable to 7 degrees)
- Tilt-Out Insulated Front Glass
- Easy Removable Deck Pans for Cleaning
- Programmable Digital Refrigeration Controller
- Self-Contained Refrigeration with Slide-In Base
- Rear Air Ventilation Kit
- Energy Efficient LED Lighting (Plug-In)
- Fan Assisted Cooling System
- Lift-Up Evaporator
- ETL Listed in Accordance with UL 471 and NSF 7 Standards
- Environmentally Safe Refrigerant
- 5 Year Compressor Warranty
- Condensate Pan Included (self contained only)

OPTIONAL FEATURES

- ☐ Flantastic Coil (For Increase Natural Humidity)
- ☐ Drop-In Style (Consult Factory for Additional Information)
- ☐ Remote Refrigeration
- ☐ Powder Coat Finish
- ☐ Front Air Ventilation
- ☐ Rear Cutting Board
- ☐ Mirrored Rear Access Doors
- ☐ Rear Sliding Access Doors
- ☐ Rear Door Locks
- ☐ Integrations Modular Counter (Consult Factory)
- ☐ Adjustable Legs & Casters (Slide-In Units)
 - ☐ 6" Legs ☐ 8" Legs
 - ☐ 6" Casters

New Optional Feature: Flantastic Coil


Advanced technology with evaporative cooling system that adds natural humidification for increase in product freshness




Conforms to UL Standard 471, and NSF Standard 7; Certified To CSA Standard C22.2 No.120

SELF CONTAINED	L	D	H	HP	VOLT	AMPS	PLUG	WT	REFRIG.	DROP IN C/O SIZE	SLIDE IN C/O SIZE
VICD2-27-R-SQ-SC-INS-FRL	31 1/2	27 3/8	28	1/3	115	5.7	5-15P	532	134A	29 1/4 x 26 3/8	29 1/4 x VARIES
VICD3-27-R-SQ-SC-INS-FRL	44 3/8	27 3/8	28	1/3	115	6.0	5-15P	581	134A	42 1/8 x 26 3/8	42 1/8 x VARIES
REMOTE	L	D	H	BTU	VOLT	AMPS	PLUG	WT	REFRIG.	DROP IN C/O SIZE	SLIDE IN C/O SIZE
VICD2-27-R-SQ-RR-INS-FRL	31 1/2	27 3/8	28	1263	115	1.2	5-15P	482	R134A	29 1/4 x 26 3/8	29 1/4 x VARIES
VICD3-27-R-SQ-RR-INS-FRL	44 3/8	27 3/8	28	1638	115	1.5	5-15P	531	R134A	42 1/8 x 26 3/8	42 1/8 x VARIES

MODEL # VICD-SQ-FRL SQUARED FRAMELESS GLASS

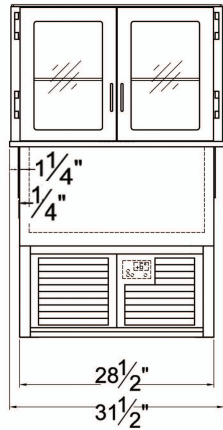


VICD2-27-R-SQ-SC-INS-FRL

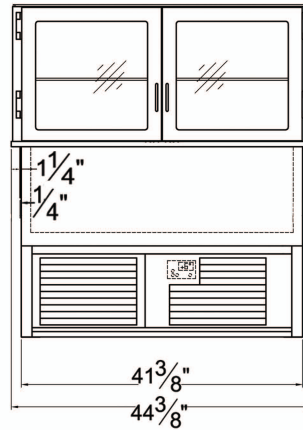

VICD3-27-R-SQ-SC-INS-FRL

VICD(A)-27-R-SQ-SC INS

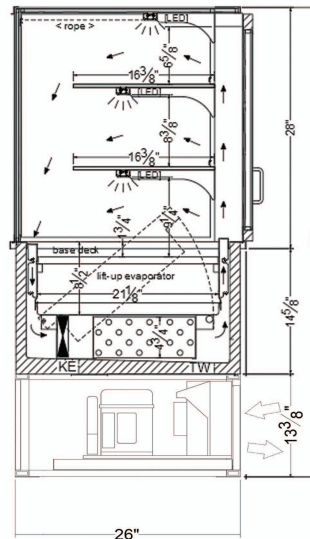


Click on below
links to access
KCL / Revit files
VICD2
VICD3

LARGEST DIMENSION REPRESENTS OUTSIDE FLANGE

1. Ventilation louvers, **MUST** be provided in the cabinet or counter and located so to provide full ventilation for the condensing unit.
2. The VICD-SQ-INS-FRL merchandiser is designed for use in locations where temperatures and humidity do not exceed 75 degrees and 55% R.H. Locate away from direct sunlight, rapid air currents and extreme temperature changes. Exposure to air currents from ceiling fans, air conditioners, ovens, etc. will disrupt the cases air current and refrigeration zone within. Any adverse field conditions stated above will void warranty.

RPI in line with it's policy to continually improve it's product reserves the right to change materials and specifications without notice.

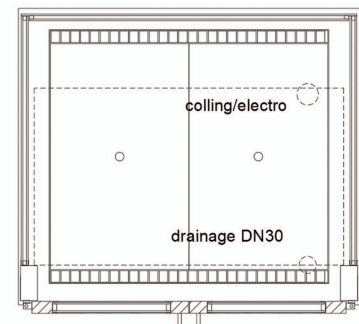

CALL TOLL FREE: 800-525-3692 (609-714-2330)

FAX: 609-714-2331 www.rpiindustries.com

220 ROUTE 70, MEDFORD, NJ 08055



Electrical & Plumbing locations

INDUSTRIES, INC. v1_7_21